

Rubber Hose

Kanapower AT

Heavy-duty abrasion resistant suction and discharge hose.


Temp. Range: -30°F to 140°F

Applications: Abrasion resistant suction and discharge hose designed for demanding applications such as slurry in micro-tunneling applications and directional boring.

Construction: SBR rubber blended with static dissipating carbon black.

Note: 6" size is not a stock item. Consult factory for availability.

Inside Dia. Inches	Outside Dia. Inches	Pitch Dia. Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In/Hg	Weight Lbs/Ft	Standard Length Ft
4	5.04	.65	10.0	140	28.0	2.85	60,100
6	7.26	.87	16.0	140	28.0	4.50	See note

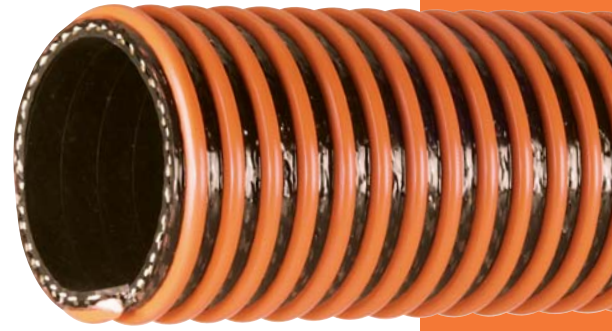

Rubber Hose

Banding Sleeve

Plastic banding sleeve for use with Kanapower ST 120 LT hose.

Temp. Range: -40°F to 140°F

Applications: 9" sections are recommended at each end of the ST 120 LT tank truck drop hose.

Construction: PVC construction, corrugated inside, smooth O.D.

Available Sizes: 3" and 4".



Banding Coil (black or white)

Black or white PVC banding coil available in 3" and 4" sizes for the Kanapower ST 120 LT hose.

Applications: Use approximately 4" of banding coil to cover a 9" length of each end of the ST 120 LT hose.

