


Duct Hose

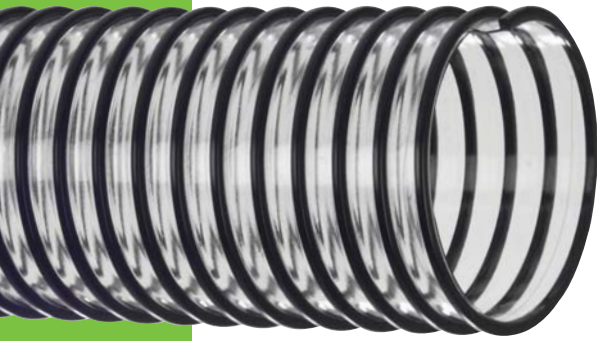

150 CL

Lightweight PVC blower and ducting hose.

Temp. Range: -13°F to 140°F

Applications: Lightweight general ducting for ventilation and grass clippings, leaves, dust and fumes.

Construction: Flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.

Inside Dia. Inches	Outside Dia. Inches	Pitch Dia. Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In/Hg	Weight Lbs/Ft	Standard Length Ft
2 ¹ / ₂	2.81	.55	2.5	6	—	.37	50,100
3	3.37	.59	3.0	6	—	.54	50,100
4	4.41	.61	4.0	5	—	.71	50,100
5	5.55	.80	5.0	3	—	1.00	50,100
6	6.51	.80	6.0	3	—	1.29	50,100
7	7.54	.85	7.0	2	—	1.38	50,100
8	8.55	.85	8.0	2	—	1.71	50

Duct Hose



150 UDH / 150 UDH BK

Urethane medium-duty blower and ducting hose.

Temp. Range: -20°F to 140°F

Applications: Medium-duty ducting and blower applications. For use with light to medium weight abrasives, leaf and grass collection, cotton pickers, mulch blowing, dust and sawdust collection.

Construction: Flexible clear polyurethane, rigid PVC helix, smooth bore, corrugated O.D.

Features: Lightweight and flexible. External helix provides for easy drag. Abrasion-resistant polyurethane and smooth bore eliminate material build-up.

Note: 150 UDH BK is not a stock item. Contact factory for minimum run quantities.

Inside Dia. Inches	Outside Dia. Inches	Pitch Dia. Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In/Hg	Weight Lbs/Ft	Standard Length Ft
2 ¹ / ₂	2.89	.53	2.5	9	16.0	.34	50
3	3.46	.57	3.0	8	15.0	.48	50
4	4.46	.59	4.0	7	12.0	.70	50
5	5.57	.83	5.0	6	9.0	1.10	50
6	6.56	.83	6.0	5	7.0	1.30	50
7	7.59	.85	7.0	4	6.0	1.56	50
8	8.59	.85	8.0	3	5.0	1.65	50