

# PVC Hose

## 200 SFG

*Food grade suction and discharge hose.*

**Temp. Range:** -13°F to 140°F

**Applications:** Food grade suction hose for use in canning, dairy and bottling.

**Construction:** Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, smooth bore, corrugated O.D.



Inside Dia. Inches	Outside Dia. Inches	Pitch Dia. Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In/Hg	Weight Lbs/Ft	Standard Length Ft
1	1.25	.30	1.5	50	29.8	.18	100
1 <sup>1</sup> / <sub>4</sub>	1.52	.33	2.0	45	29.8	.22	100
1 <sup>1</sup> / <sub>2</sub>	1.81	.35	2.5	45	29.8	.35	100
2	2.36	.39	4.0	40	29.8	.50	100
2 <sup>1</sup> / <sub>2</sub>	2.87	.56	4.5	35	29.8	.68	100
3	3.50	.59	6.0	35	29.8	1.00	100
4	4.63	.65	8.0	30	29.8	1.52	100

### Metric

45	2.13	.39	4.0	37	29.8	.45	100
57	2.60	.43	4.5	35	29.8	.60	100


## ST 200 SFG

*Food grade PVC hose for pneumatic conveying.*

**Temp. Range:** -13°F to 140°F

**Applications:** Pneumatic conveying of lightweight solids such as powders and plastic pellets.

**Construction:** Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, multi-strand copper static grounding wire, smooth bore, corrugated O.D.

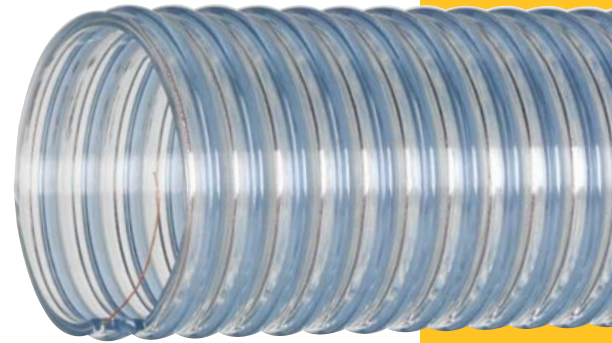

Inside Dia. Inches	Outside Dia. Inches	Pitch Dia. Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In/Hg	Weight Lbs/Ft	Standard Length Ft
1 <sup>1</sup> / <sub>2</sub>	1.81	.35	2.5	45	29.8	.44	50,100
2	2.36	.39	4.0	40	29.8	.58	50,100
2 <sup>1</sup> / <sub>2</sub>	2.87	.56	4.5	35	29.8	.75	50,100
3	3.50	.59	6.0	35	29.8	1.07	50,100
4	4.63	.65	8.0	30	29.8	1.52	50,100

### Metric

45	2.17	.39	4.0	37	29.8	.53	50,100
57	2.64	.43	4.5	35	29.8	.67	50,100