


PVC Hose

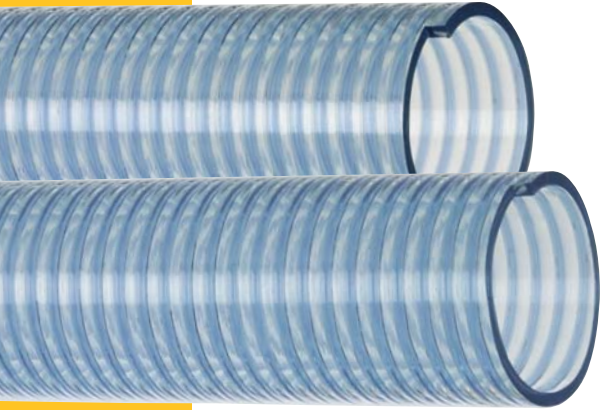

210 HFG / 212 MK

Heavy-duty food grade suction and discharge hose.

Temp. Range: -13°F to 140°F

Applications: 210 HFG: Heavy duty food grade suction hose for bottling and dairy industries.

212 MK: More flexible. Designed for milk hauling (tank truck) and pick-up.

Construction: Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, smooth bore, smooth O.D.


210 HFG

Inside Dia. Inches	Outside Dia. Inches	Pitch Dia. Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In/Hg	Weight Lbs/Ft	Standard Length Ft
3/4	.96	.22	1.9	86	29.8	.16	100
1	1.25	.22	1.9	86	29.8	.26	100
1 1/4	1.54	.26	2.7	79	29.8	.37	100
1 1/2	1.82	.30	2.8	72	29.8	.44	100
2	2.39	.33	3.9	72	29.8	.74	100
2 1/2	2.93	.37	5.0	72	29.8	1.01	100
3	3.43	.37	7.0	62	29.8	1.21	100
4	4.53	.43	9.1	55	29.8	2.01	100

212 MK

1 1/2	1.82	.30	2.0	66	29.8	.44	100
2	2.39	.33	2.5	66	29.8	.74	100
2 1/2	2.93	.37	4.7	66	29.8	1.01	100
3	3.43	.37	6.1	62	29.8	1.21	100

PVC Hose

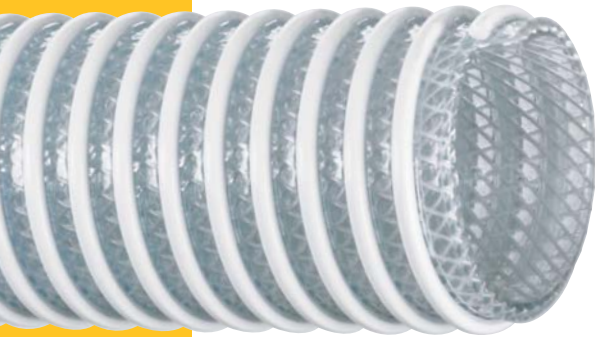

Kanaline FW

Heavy-duty food grade suction and discharge hose.

Temp. Range: -13°F to 140°F

Applications: Heavy duty food grade suction and discharge hose for bottling, wine making, canning, dairy, brewing and liquid foods.

Construction: Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, synthetic braiding, smooth bore, corrugated O.D.

Features: Lightweight and flexible. External helix provides for easy drag. Rated for both suction and discharge. Clear sidewall permits visual check of material flow.

Inside Dia. Inches	Outside Dia. Inches	Pitch Dia. Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In/Hg	Weight Lbs/Ft	Standard Length Ft
1 1/2	2.03	.39	2.5	110	28.0	.56	100
2	2.60	.41	4.0	100	28.0	.75	100
3	3.70	.59	6.3	100	28.0	1.20	100
4	4.78	.65	7.1	75	28.0	1.74	100