

Rubber Hose



ST 120 VP

Gasoline vapor recovery hose.

Temp. Range: -40°F to 140°F


Applications: Gasoline vapor recovery only.

Construction: Nitrile rubber, rigid PVC helix, smooth bore, corrugated O.D., static grounding wire.

Note: Static wire must be properly imbedded during fabrication and tested to assure static grounding of hose to a grounded system.

Inside Dia. Inches	Outside Dia. Inches	Pitch Dia. Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In/Hg	Weight Lbs/Ft	Standard Length Ft
2	2.36	.39	3.0	20	29.8	.61	60,100
3	3.46	.59	2.5	10	29.8	1.00	60,100
4	4.57	.65	5.0	10	29.8	1.70	60,100

Rubber Hose

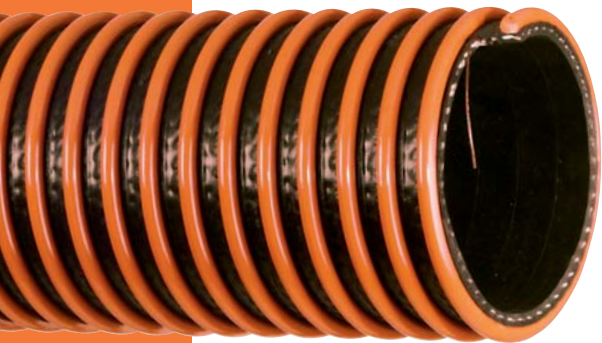

Kanapower ST 120 LT

Tank truck drop hose with static grounding wire; 50% lighter than conventional rubber hose.

Temp. Range: -30°F to 140°F

Applications: Gasoline tank truck gravity drop hose for such items as naphtha, kerosene, light and heavy oil, diesel and up to 15% gasohol.

Construction: Nitrile rubber, rigid PVC helix, synthetic braiding, smooth bore, static grounding wire, corrugated O.D.

Features: Lightweight and flexible. External helix provides for easy drag. Rated for up to 40% aromatic content.

Note: Banding sleeves must be used for 3" and 4" sizes.

Static wire must be properly imbedded during fabrication and tested to assure static grounding of hose to a grounded system.

Inside Dia. Inches	Outside Dia. Inches	Pitch Dia. Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In/Hg	Weight Lbs/Ft	Standard Length Ft
2	2.68	.39	5.0	65	29.8	1.13	60,100
3	3.68	.59	6.0	65	29.8	1.37	60,100
4	4.82	.65	8.0	65	29.8	2.16	60,100