

N-12[®] Low Head Irrigation Pipe



The Challenge of Bringing Water to the West

Water resources are a major challenge in the Western United States. Population growth and frequent rainfall shortages have highlighted the need for improvement to an aging and inadequate water delivery infrastructure.

For generations, water distribution has been accomplished through irrigation canals and open earth ditches. However, the increased burden on the water system has highlighted its inefficiencies. In parts of the Southwest, water loss from evaporation is estimated at 100" per year. Couple that with infil-

tration loss, and the problem is even more significant.

While enclosing these canals with pipe is one way of conserving and stretching water supplies, the installation of pipe for irrigation has been difficult and cost prohibitive due to inadequate, inappropriate or over-designed pipe.

The engineered solution

Advanced Drainage Systems has developed an innovative, cost-effective pipe, designed to meet this growing need. Low Head irrigation pipe is specifically designed to meet the needs of this challenging market through its structural performance, joint integrity, flow capacity, design flexibility and economy

The Next Generation of Performance

Over the last 40 years, Advanced Drainage Systems' corrugated high density polyethylene (HDPE) pipe has been building a reputation for economy, durability and superior performance in gravity-flow, drainage applications. During the 1970s and 80s, ADS single wall pipe became the preferred product for agricultural, highway, mining, turf/recreation, and residential drainage markets.

N-12® WT Pipe

The hydraulic capabilities of single wall pipe were significantly improved in 1987 when ADS introduced N-12® pipe, the first HDPE drainage pipe combining an annular corrugated exterior for strength with a smooth interior wall for maximum flow capacity. Named for its excellent Manning's "n" rating of 0.012, N-12 pipe was designed specifically for storm sewer systems, highways, airports, and other engineered construction sites. Through extensive field and university testing, ADS engineers were able to refine the corrugated wall design for diameters up to 60" (1500mm) without compromising the pipe's excellent strength-to-weight ratio. Its performance and economy have led to rapid acceptance by contractors and engineers, and to official approvals by state and municipal agencies.


In 2001, the advancement in HDPE storm drainage pipe continued with the introduction of N-12® WT pipe, with integral watertight bell and spigot joints. Incorporating patented tech-

nology developed in the aerospace industry, N-12 WT pipe introduced two important design innovations: (1) the sealing area of the integral bell was reinforced with a proprietary 2" (50mm) polymer collar this improves the joint's integrity and dimensional stability, and (2) a proprietary gasket design engineered to maximize sealing surface and meeting ASTM F477 is factory installed onto the spigot. The result was a design that meets or exceeds ASTM F1417 or ASTM D2487 watertight field test requirements, and fills an essential role in complying with the stringent demands of new EPA water quality guidelines.

N-12® Low Head Pipe


Building on the success of N-12 WT pipe, the next generation of performance in HDPE pipe has been achieved with the introduction of N-12 Low Head pipe.

ADS engineers started by modifying the integral bell joint to better suit the irrigation market. Longer bells and spigots provide for increased joint offsets while maintaining watertight per-

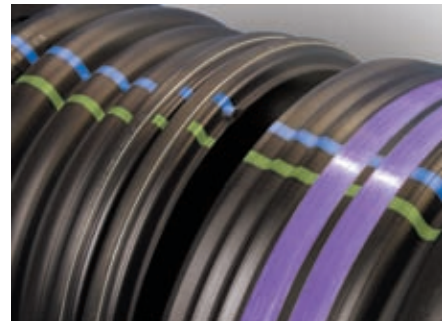


formance. The bell is reinforced with multiple polymer bands, increasing sealing area and joint performance. The spigot has been designed with two gaskets to provide redundant sealing of the joint. These modifications provide a watertight flexible joint tailored for the low head irrigation market.

In addition to joint improvements, ADS engineers designed a pipe capable of handling the pressure associated with low head irrigation. N-12 Low Head pipe is extruded with a pressure-rated resin (PE 3408) in the liner portion of the pipe. This resin is the same as that used in high pressure gas transmission throughout the country. Although not required in traditional gravity flow non-pressure drainage applications, the addition of a pressure rated resin allows continuous pressure (up to 5 psi with surge pressures up to 10 psi) to be applied while maintaining long-term performance.

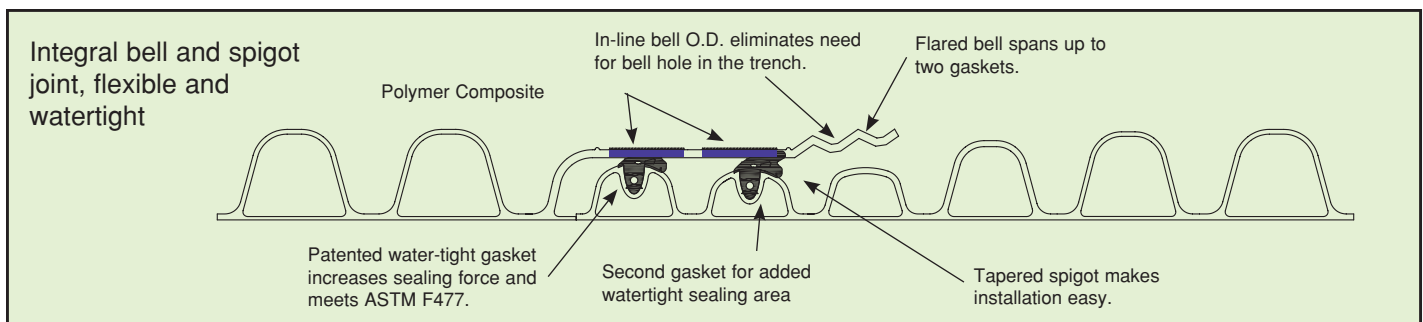

The Highest Standards in Design

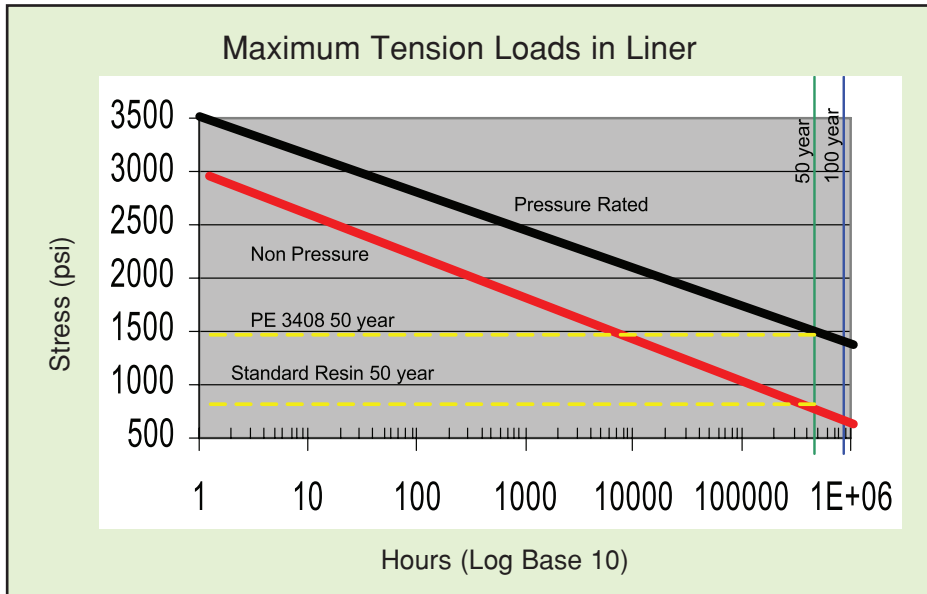

Applications

ADS Low Head pipe can be specified for ditch enclosures for irrigation, irrigation pipe replacement, and other low head irrigation projects. The pipe is available in 24" (600mm) through 60" (1500mm) diameters, and meets or exceeds AASHTO M294 Type S, and ASTM F2306 due to its HDB (pressure rated) resin and advanced connection design.

Structural strength

As a flexible conduit, HDPE pipe withstands vertical pressure by transferring most of the overhead load to the surrounding soil. ADS Low Head pipe will support H-25 live loads with a minimum of 12" of cover (24" for 60" pipe), an important consideration in low head pressure applications. Maximum cover will vary with design conditions, see fill height tables in Technical Note 2.01.

Durability

High density polyethylene is an extremely tough material that can easily withstand the normal impacts involved in shipping and installation. It is highly resistant to chemical attack, and is unaffected by soils or effluent with pH ranges of 1.5 to 14.

HDPE's ductility and molecular structure result in excellent resistance to abrasion. Polyethylene pipe shows less than 20% of the material loss of concrete pipe in abrasive environments, and is often specified for harsh mine slurries and as a slip liner for deteriorated culverts.

Hydraulic efficiency

The smooth interior of ADS Low Head pipe provides the superior flow characteristics that are essential for efficient transmission of irrigation water. ADS low head pipe has a Manning's coefficient of 0.012 which is among the most efficient in the industry.

Light weight

HDPE pipe is up to 30 times lighter than traditional piping products, making it far easier to transport and handle. On-site labor and equipment requirements are reduced, with a corresponding reduction in the risk of potential injury.

Fast installation

Long 19' 8" (6m) lengths mean fewer joints. Joints are typically the weakest link in any low head irrigation system and should be minimized. ADS Low

Head pipe joints are among the best on the market, with quick and easy push-together connections made possible with our integral gasketed bell and spigot design.

Lowest installed cost of any low head irrigation pipe

The material cost of HDPE pipe is extremely competitive with other low head transmission pipe materials. When installation costs are factored in, the savings begin to multiply:

- Polyethylene's light weight cuts shipping charges.
- Fewer people are needed for on-site unloading and handling.
- Heavy equipment requirements are reduced.
- Long lengths are easy to handle and require fewer joints.
- Bell and spigot joint design reduces labor time for assembly.

Installation recommendations

Proper installation is essential for the long term performance of any pipe structure. The basic procedures for ADS Low Head pipe are very similar to the requirements of most other pipe products.

ADS Low Head Irrigation pipe is a flexible conduit which transfers live and dead loads to the surrounding soil. Therefore, particular care is required in bedding, backfill, compaction, and the selection of backfill material. Class I or II soils may be used for backfill, and should be compacted to at least 90% Standard Proctor Density.

Instructions for installation of underground plastic drainage pipe are contained in ASTM D2321. Specific instructions for ADS Low Head pipe are detailed in ADS Corrugated HDPE Pipe Installation Guide.


The Perfect Integration of Engineering and Need



ADS N-12 Low Head pipe is the only pipe designed specifically for the low head irrigation market.

- Longer bells and spigots for joint flexibility
- Multiple reinforcing wraps on bells for larger seating area
- Multiple gasket options
- Pressure rated interior liner
- Longer pipe lengths for fewer joints
- Proven toughness and durability
- Structural strength
- Hydraulic efficiency
- Light weight, easy to handle
- Fast installation
- Low installed cost

ADS Sales and Service Locations

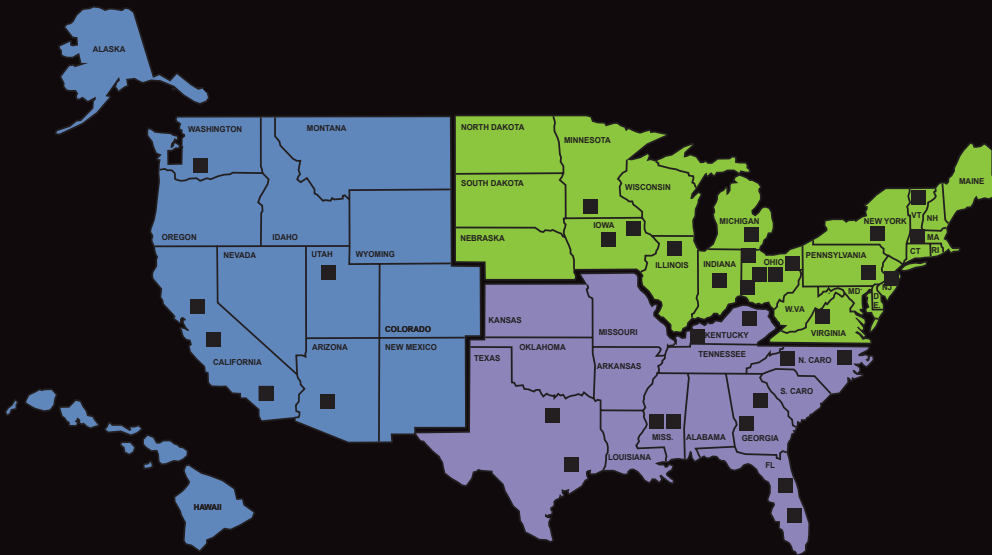

ZONE OFFICES

MIDWEST/NORTHEAST

LONDON, OH
1-800-733-9554

SOUTHERN

FRANKLIN, TN
1-800-733-9987

WESTERN

VANCOUVER, WA
1-800-733-8523

**MANUFACTURING
FACILITY
LOCATIONS**

For more information on N-12® Low Head Irrigation pipe, and the complete line of ADS drainage products, log on to www.ads-pipe.com, or call 1-800-821-6710.

ADS "Terms and Conditions of Sale" are available on the ADS website.



**THE MOST
ADVANCED
NAME IN
DRAINAGE
SYSTEMS®**



ADVANCED DRAINAGE SYSTEMS, INC.
4640 TRUEMAN BLVD., HILLIARD, OH 43026
800-821-6710 www.ads-pipe.com