


FRIALEN® DAP Pressure Tapping Tees with parallel dome and extra long outlet spigot

PE 100 SDR 11

Maximum working pressure 16 bar (water) / 10 bar (gas)

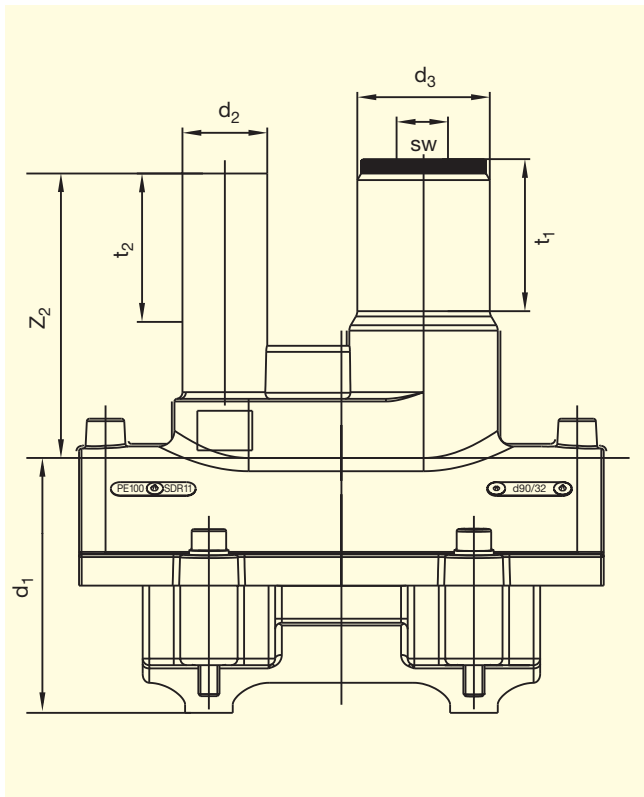

d ₁	d ₂	Order Ref.	Stock- status	VE	PE	d ₃	Drilling Ø	t ₁	t ₂	Z ₂	SW	Weight kg/each
63	32	T-616 042	1	16	288	40	21	50	84	125	17	0.560
90*	32	T-616 043	1	16	128	50	30	58	65	115	19	1.130
110	32	T-615 581	1	12	96	50	30	58	115	158	19	1.255
110	50	T-615 606	1	12	96	50	30	58	115	158	19	1.310
125	32	T-615 711	1	12	96	50	30	58	115	158	19	1.270
125	50	T-615 712	1	12	96	50	30	58	115	158	19	1.330
160	32	T-615 713	1	8	64	50	30	70	115	170	19	1.540
160	50	T-615 714	1	8	64	50	30	70	115	170	19	1.600
180	32	T-615 715	1	6	48	50	30	70	115	170	19	1.540
180	50	T-615 716	1	6	48	50	30	70	115	170	19	1.600
225	32	T-615 717	1	6	48	50	30	72	115	170	19	1.570
225	50	T-615 718	1	6	48	50	30	72	115	170	19	1.630

FRIALEN®-Pressure Tapping Tees $\leq d$ 63 can be fused to pipes of SDR stage 11
and $> d$ 63 to pipes of SDR stages 11 to 17.6

*Maximum working pressure 10 bar (water) / 5 bar (gas)

DVGW-Registration Nos.: DV-8601AU2248 and DV-8606AU2249

Please turn over for important information regarding application
of **FRIALEN®** DAP Pressure Tapping Tees.



FRIALEN® DAP Pressure Tapping Tees with parallel dome and extra long outlet spigot

PE 100 SDR 11

Maximum working pressure 16 bar (water) / 10 bar (gas)

Areas of Application

The FRIALEN® DAP is used for PE-HD pipe systems both in the water and gas industry. The outlet spigot has been designed to be extra long. These pressure tapping tees are particularly suited for space-saving horizontal installation.

Assembly Instructions

Please refer to the installation instructions for FRIALEN® Safety Fittings, especially the description of how to install pressure tapping tees.

Four good reasons for using FRIALEN® DAP Pressure Tapping Tees:

- **Economy due to space-saving horizontal installation. Excavation depth of pipe system trenches reduced by 10-20 cm**
- **Protection from damage during subsequent work in the trench through the dome and outlet being positioned below the mains pipe apex**
- **Length of the outlet spigot measured for 2 fusions***
- **Additional barcode for tracing back the underground fitting (Traceability-Coding).**

In addition, all tried-and-tested advantages of a FRIALEN® Pressure Tapping Tee apply:

- Drill guidance through metallic threaded coupling
- No gas escapes during drilling process
- Little force required for drilling
- Secure position of the cut-out calotte in the drill
- Upper and lower end position
- Broad fusion zone
- Valve dome can be fused with the seal cap after drilling
- No shavings on drilling
- Possible to carry out leakage check before drilling

*not for d 90/32

For further information, please call our FRIALEN® customer service staff and specialist advisers.

FRIATEC Aktiengesellschaft · Technical Plastics Division
P.O.B. 71 02 61 · D-68222 Mannheim
Telephone +49 621 486-0 · Telefax +49 621 479196
www.friatec.de · E-Mail: info-frialeen@friatec.de

Please find our datasheets for
downloading on the internet at
www.friatec.com



an OAliaxis company