

Auxiliary tools




Auxiliary tools

	Page
Bit adapters.....	115
Reduction couplings	115
Wrenches and knock-off-tools.....	116
Fishing tools, thread grease and gauges	117
Drill steel straightener.....	118


Auxiliary tools

Bit adapters

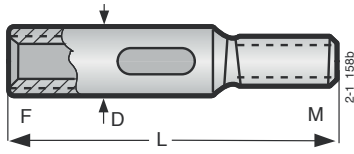

Wrench flat mm	Threads		Dimensions L			D		Part No.
	F	M	mm	ft	in	mm	in	
28.5	R23	R32	200	-	7 7/8"	35	1 3/8"	7837-3301
38	R25	R32	173	-	6 13/16"	45	1 3/4"	7832-3301
38	R28	R32	230	-	9 1/16"	40	1 37/64"	7839-3301
38	R32	T38	225	-	8 55/64"	45	1 49/64"	7833-4401
38	R32	R38	225	-	8 55/64"	45	1 49/64"	7833-4301
38	T35	T38	250	-	9 27/32"	48	1 7/8"	7337-4401
44.5	R38	R32	270	-	10 41/64"	55	2 5/32"	7834-3303
44.5	R38	T38	245	-	9 21/32"	55	2 5/32"	7834-4401
44.5	T38	R32	270	-	10 41/64"	57	2 1/4"	7334-3301
44.5	T38	T45	285	-	11 7/32"	57	2 1/4"	7334-5401
44.5	T38	R38	280	-	11 1/32"	57	2 1/4"	7334-4301
38	T45	T38	265	-	10 7/16"	63	2 31/64"	7335-4401
44.5	T45	T51	285	-	11 7/32"	63	2 31/64"	7335-6401
44.5	T51	T45	285	-	11 7/32"	71	2 51/64"	7336-5401


Reduction couplings





Threads		Dimensions L			D		Part No.
F1	F2	mm	ft	in	mm	in	
R32	R28	165	-	6 1/2"	44	1 47/64"	7993-0444
R32	R25	160	-	6 1/4"	43	1 11/16"	7993-2443
R38	R32	170	-	6 3/4"	55	2 5/32"	7994-3455
T38	R32	195	-	7 11/16"	55	2 5/32"	7314-3555
T38	R38	185	-	7 9/32"	55	2 5/32"	7314-4455
T38	T45	220	-	8 43/64"	61	2 13/32"	7314-6261
T51	T45	218	-	8 19/32"	71	2 51/64"	7316-6271

Auxiliary tools

Wrenches and knock-off-tools


	Dimensions			D		Part No.	
	L	ft	in	mm	in		
For integral drill steels and shank rods							
	Hex 19	600	1'	11 5/8"	19	3/4"	795-1407
	Hex 22	600	1'	11 5/8"	22	7/8"	795-1408
	Hex 28	600	1'	11 5/8"	28	1 1/8"	795-2423

For extension rods

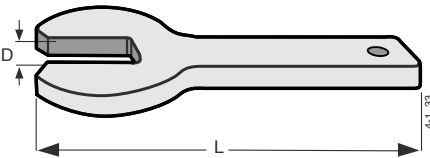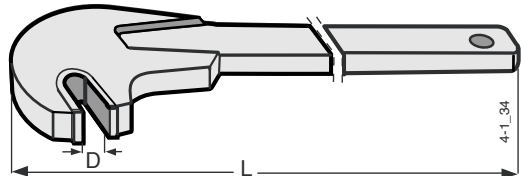	Hex 25, Round 32	300	–	11 13/16"	25	1"	795-1431
	Hex 28	300	–	11 13/16"	28	1 1/8"	795-1492
	Hex 32, Round 39	370	1'	2 9/16"	32	1 1/4"	795-1432
	Round 46	370	1'	2 9/16"	38	1 1/2"	795-1494
	DTH	380	1'	2 31/32"	65	2 7/12"	795-1495
	Hex 35	620	2'	13/32"	35	1 25/64"	795-2476
	Round 52	850	2'	9 15/32"	45	1 3/4"	795-1420

Knock-off-tools for Hex 22 and Hex 25 pilot rods, type 7922-XXXX-XX


795-1469



Knock-off-tools for tapered bits


	Hex 22	795-1467
	Hex 25	795-1468

Pneumatic knock-off-tool for tapered bits

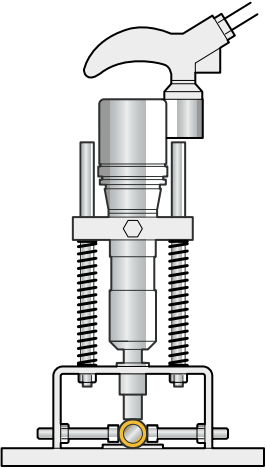
	Complete unit	796-1400
	Chisel (wear part)	797-5712-01
	Guide sleeve	797-5114-03
Technical data		
Air pressure	6-8 bar	
Air consumption	7-9 l/s	
Air hose	12.5 mm (1/2") ID	
Dimensions: (HxWxD mm)	500x300x120	
Weight	18 kg	

Auxiliary tools

Fishing tools, thread grease and gauges

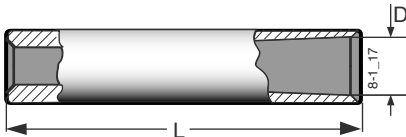	Dimensions				Part No.	
	D	D1	L	Thread		
Fishing sleeve						
	For catching					
	R22 Hex. rods	33	–	185	R22	795-1629
	R22 coupling sleeves	35	–	225	R22	795-1630
	R25 Hex. rods	39	–	215	R25	795-1631
	R25 coupling sleeves	38	–	275	R25	795-1632
	R28 Hex. rods/coupling sleeves	48	42.5	335	R28	795-1687
	R32 round/Hex. rods/coupling sleeves	48	46	300	R32	795-1604
	R38 round rods/coupling sleeves	60	–	353	R38	795-1605
	T35 round rods/coupling sleeves	52	50	284	T35	795-1613
	T38 round rods/coupling sleeves/MF-rods	60	57.2	353	T38	795-1607
	T45 round rods/coupling sleeves/MF-rods	71	68	393	T45	795-1608
	T51 round rods/coupling sleeves/MF-rods	80	75.5	440	T51	795-1609
	GT60 rods	92	87.5	450	GT60	795-2601
	GT60 rods	89	84.5	450	GT60	795-2603
ST68 tubes Ø87	102	92	410	ST68	795-1696	


Fishing pike

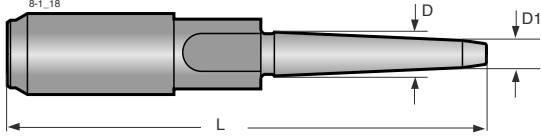	Dimensions				Part No.	
	D	D1	L	Thread		
	For catching					
	R22 rods ¹⁾	10	4	160	R22	795-1600
	R25 rods ¹⁾	12	4	200	R25	795-1601
	R28 rods ¹⁾	14.8	4	220	R28	795-1686
	R32 rods ¹⁾	19.4	4	280	R32	795-1606
	R38 rods ²⁾	18	8	237	R38	795-1611
	T38 rods ²⁾	19.4	8	237	T38	795-1676
	T45 rods ²⁾	25	8	275	T45	795-1681
	T51 rods ²⁾	27	15	285	T51	795-1690
	ST58 tubes Ø76 ²⁾	57	24	500	ST58	795-1699
ST68 tubes Ø87 ²⁾	71	32	541	ST68	795-2600	


1) Without flushing hole.

2) With flushing hole.

Thread grease


	Can 4.5 kg	215	–	170	–	795-1960
	Can 18.0 kg	300	–	380	–	795-1961
	Tube 0.40 kg	53/57	–	235	–	795-1962
	Low temperature grease, can 18.0 kg	300	–	380	–	795-1963
	Barrel 50 kg	370	–	690	–	795-1967
	Barrel 240 kg	610	–	870	–	795-1964

Gauges / Wear gauge for male and female threads

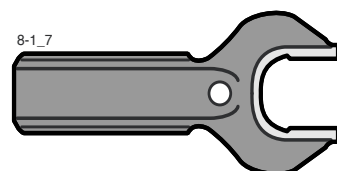

795-1336

Gauges / Chuck wear gauge



795-1343

Auxiliary tools

Drill steel straightener

Part No.

Drill steel straightener for Hex19 to Round 52

Manual/Hydraulic

796-2930

Electric/Hydraulic, 380V/50Hz

796-2930-52

Support leg, 1 piece

796-2931

